


NETWORK REQUIREMENTS

- The client network must be behind NAT, with DHCP enabled.
- A 5Ghz wireless network must be available with at least 15Mbps of available bandwidth per Set Top Box.
- The client is responsible to ensure that the internal network is in good operating condition.

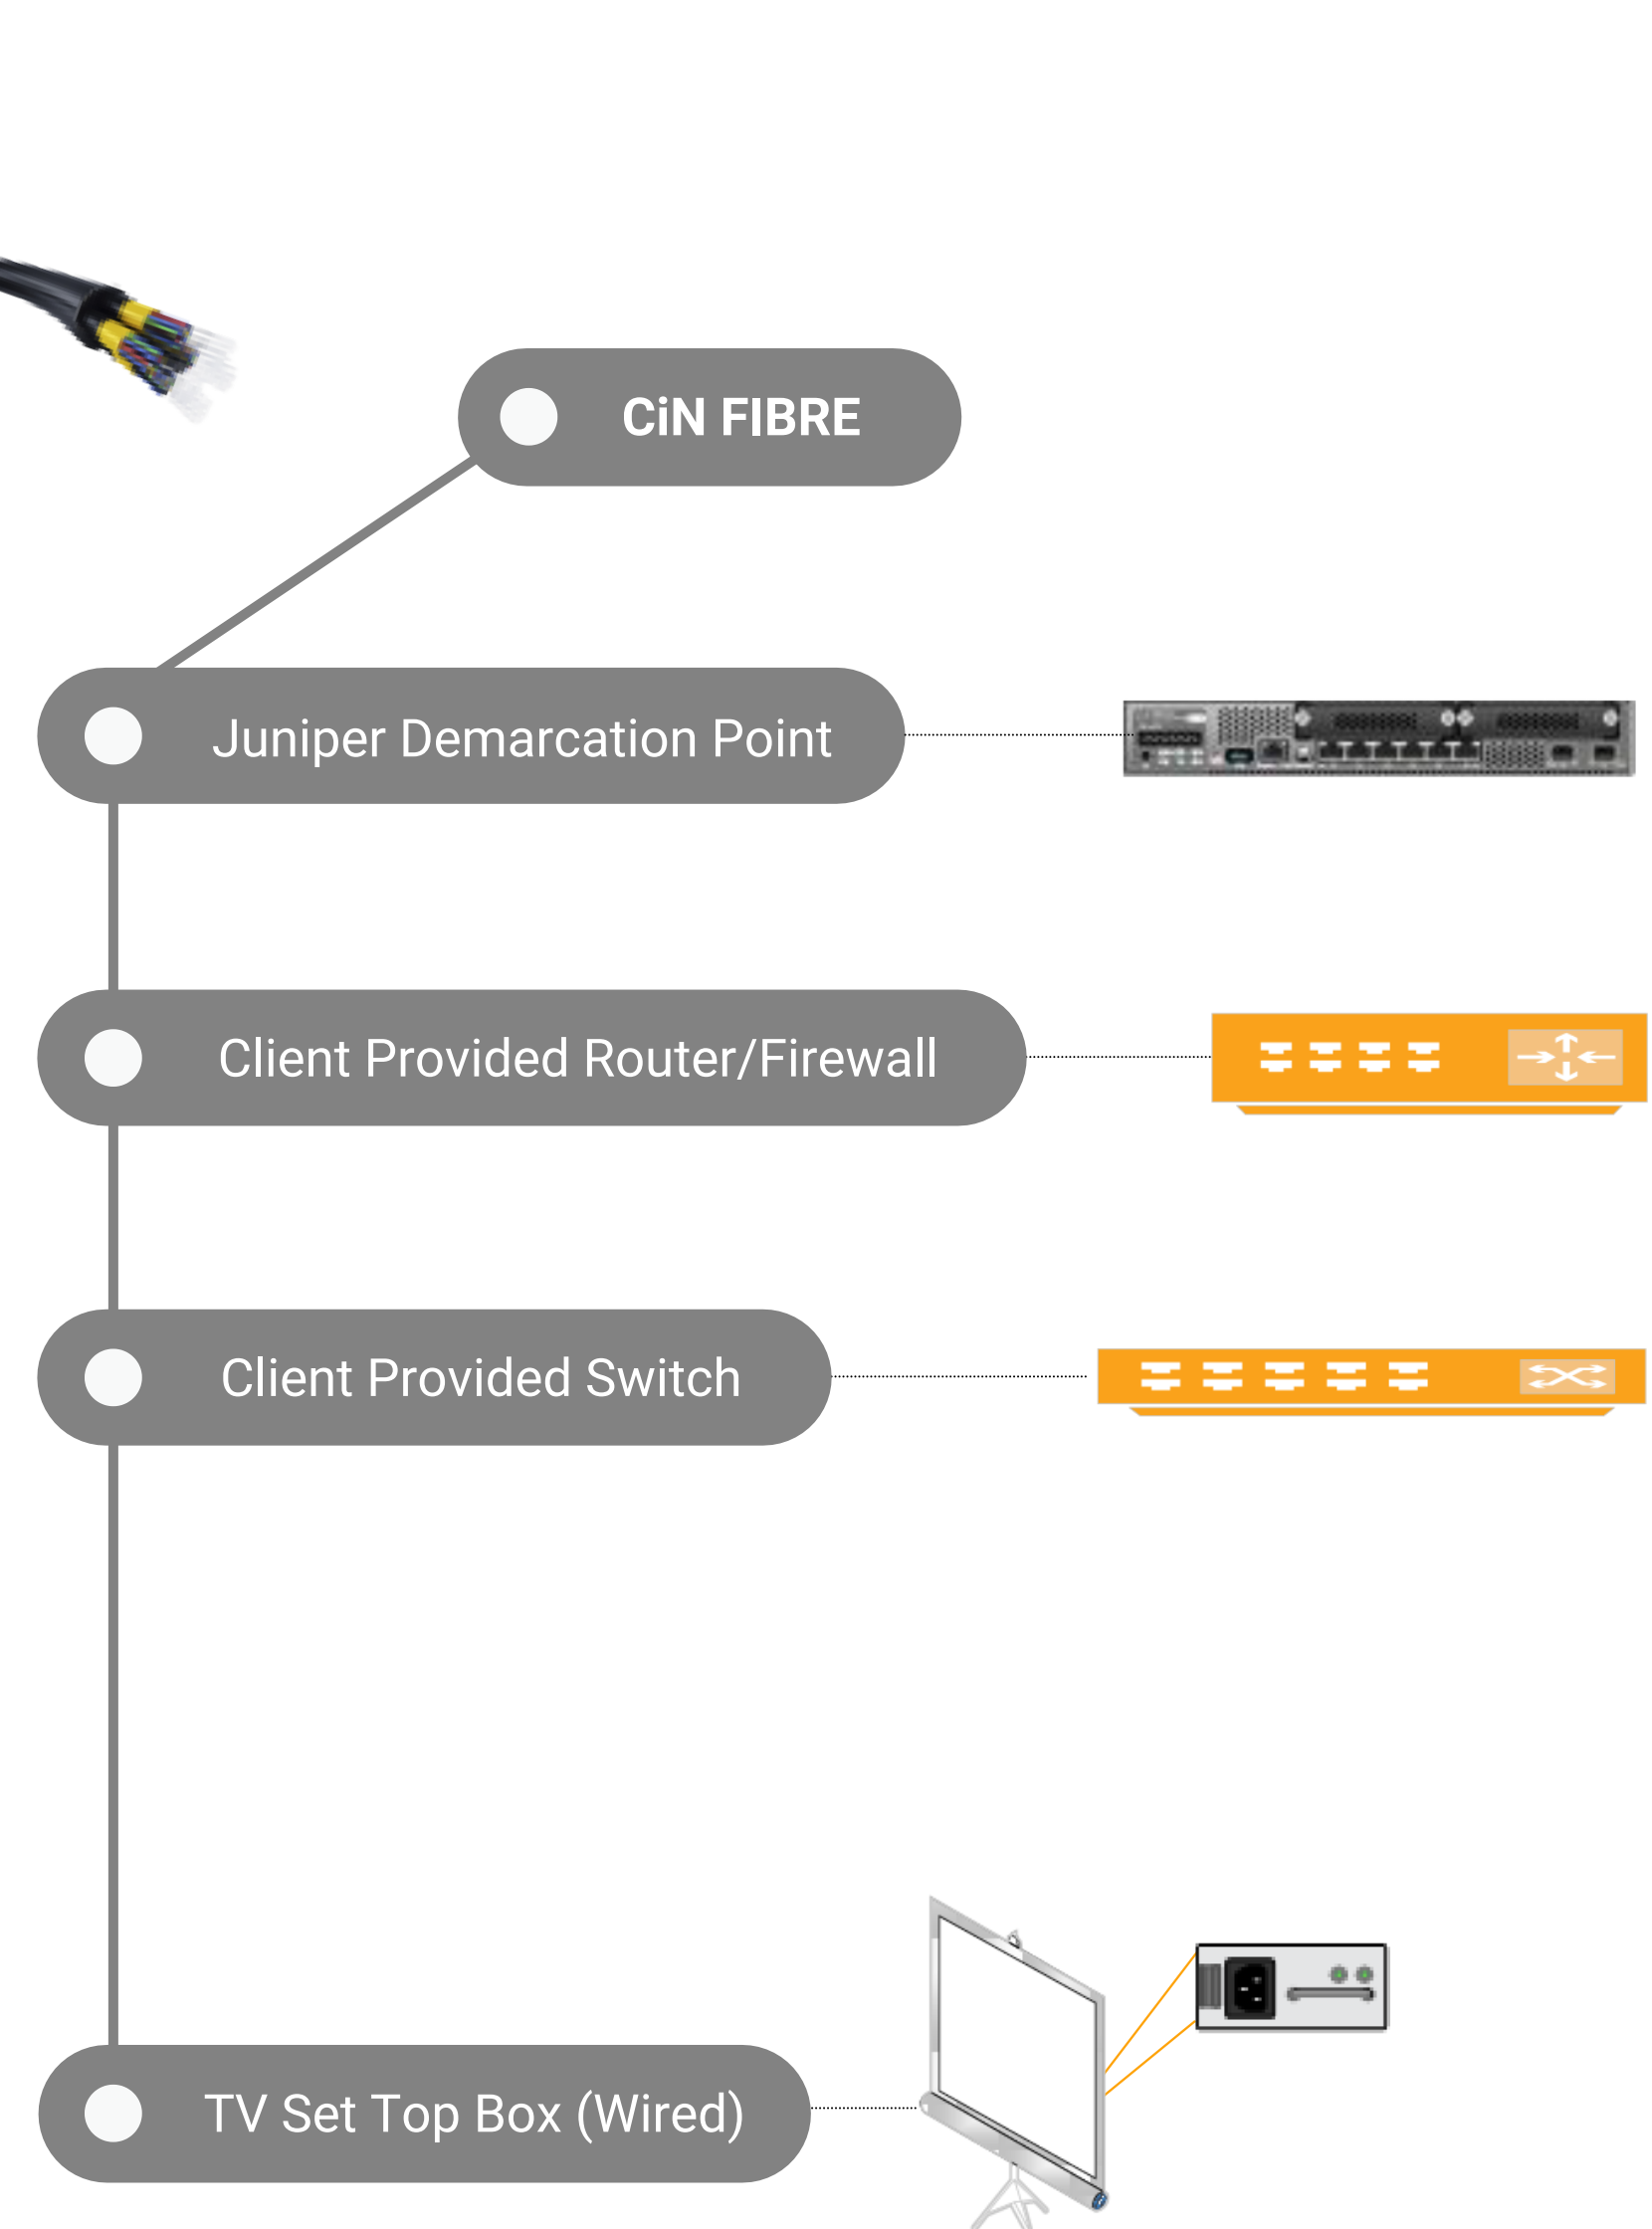

NETWORK REQUIREMENTS

- The client network must be behind NAT, with DHCP enabled.
- A Cat5e or better cable is required and network must have at least 15Mbps of available bandwidth per Set Top Box.
- The client is responsible to ensure that the internal network is in good operating condition.